



COLORKEY

COLOR YOUR SPACE



COLORKEY COLLECTION

Innovflor

The colorkey collection breaks people's conventional stereotypes of carpet tile. The designer boldly adds more natural, casual and relaxed ideas into the design. It's more than just a connection. It's a cycle of beautiful creations. Even a skinny plank can create new possibilities. We hope each space full of imagination as the home, a community filled with fascinating members collaborating, learning and growing together.

Color your space






**COLLABORATION,
IN ALL FORMS,
LEADS TO
BETTER
SOLUTIONS.**



**FASHION PERISHABLE.
STYLE IS FOREVER.**



COLORKEY 03/BC04

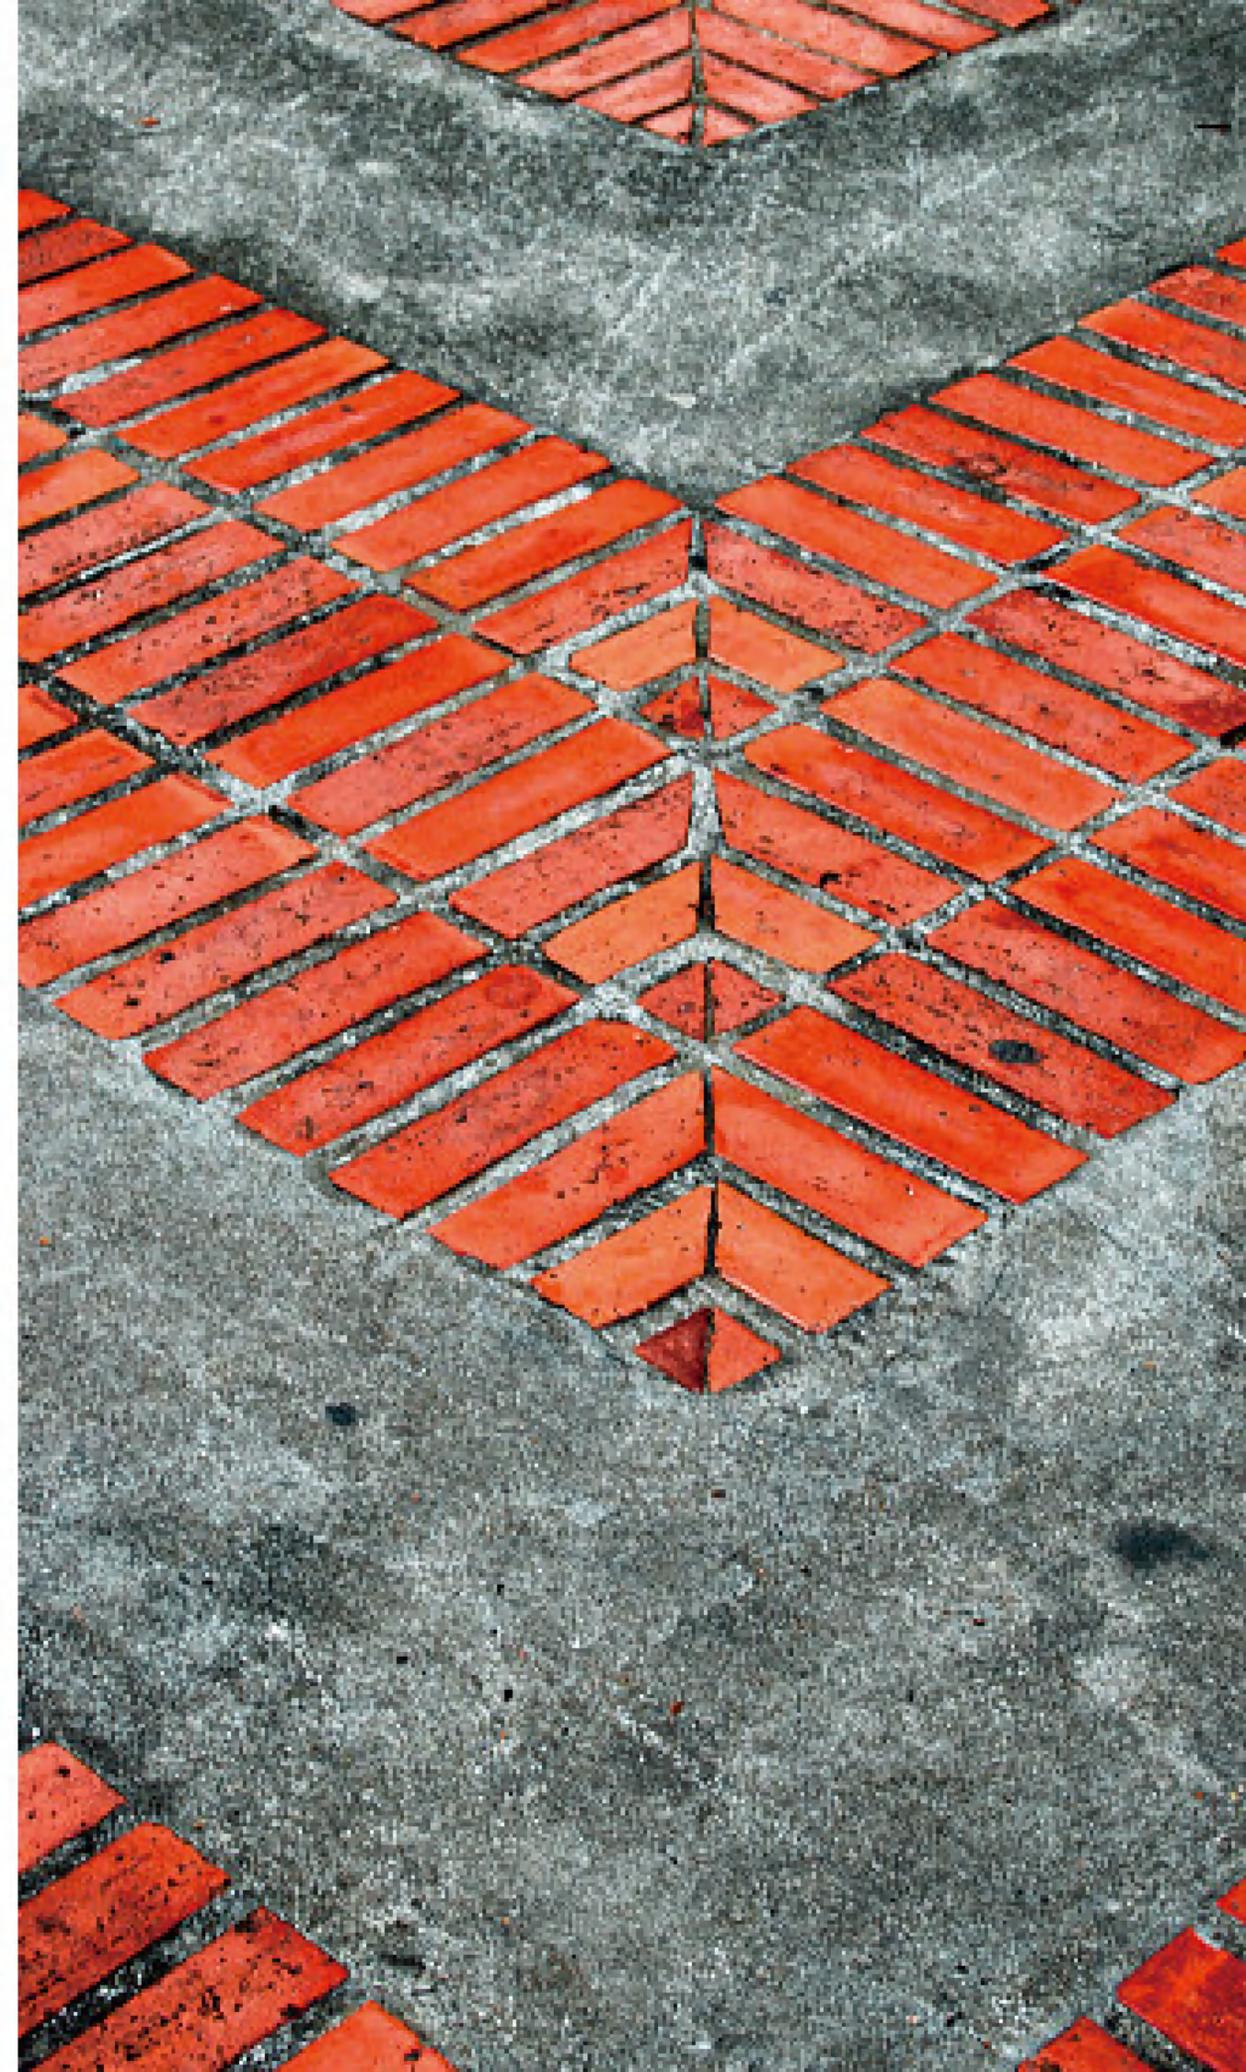






COLORKEY ABC08



COLORKEY 04/ABC07



COLORKEY ABC06

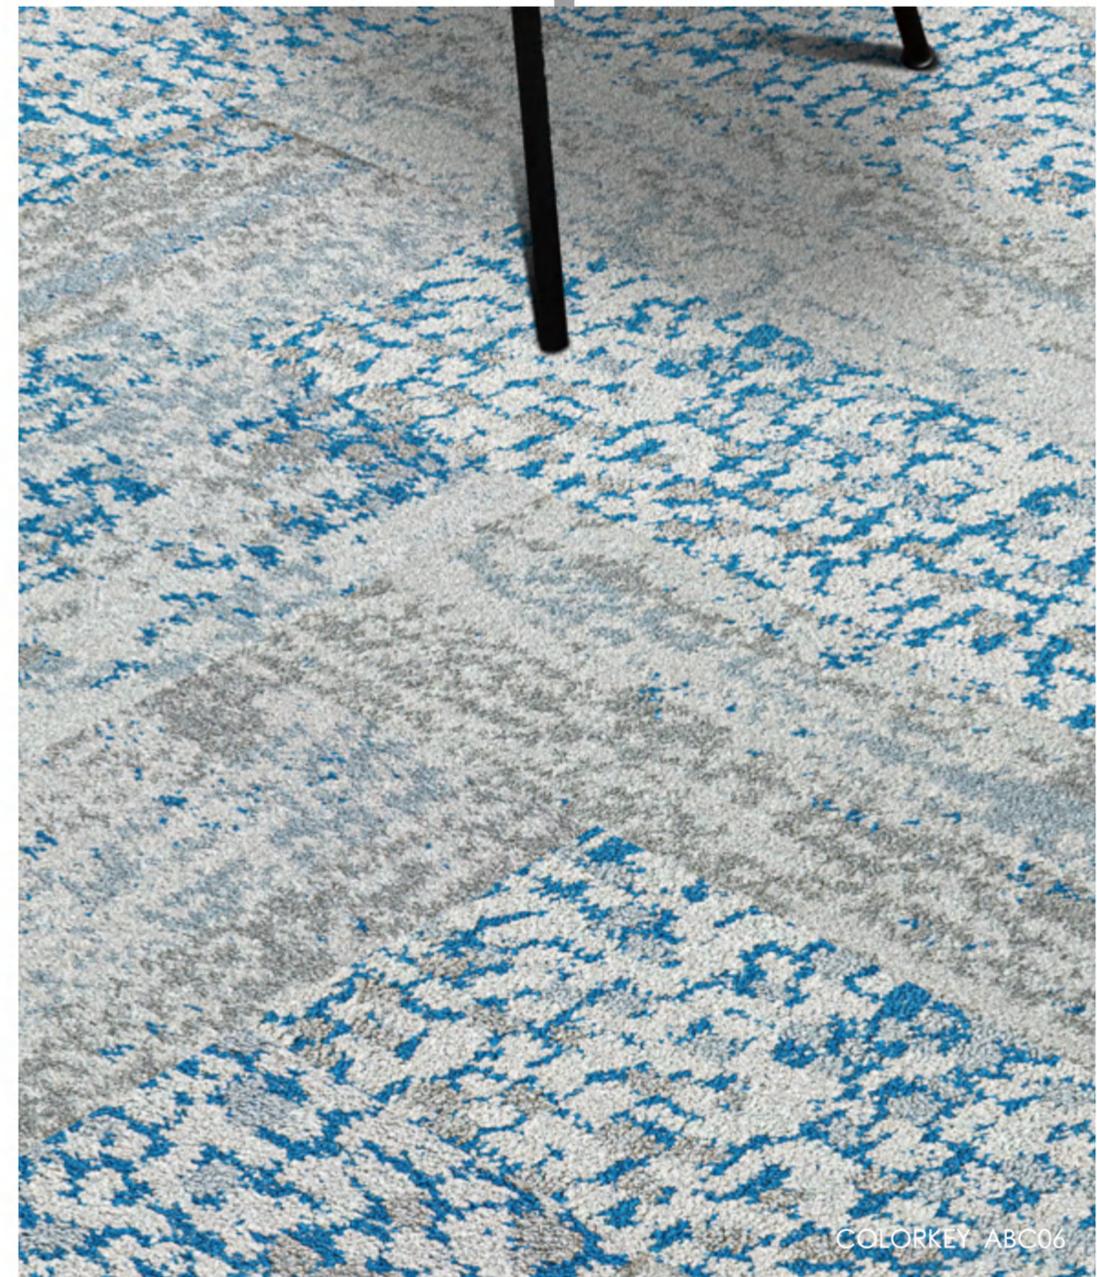

COLORKEY ABC06



COLORKEY ABC05



COLORKEY 02/ABC05





COLORKEY ABC02



COLORKEY BC03/BC02/B07

At Innovflor,
detail is every-
thing. Anything
only to do
100% is quali-
fied, 99 points
are not quali-
fied.






COLORKEY-02



COLORKEY-07



COLORKEY-01


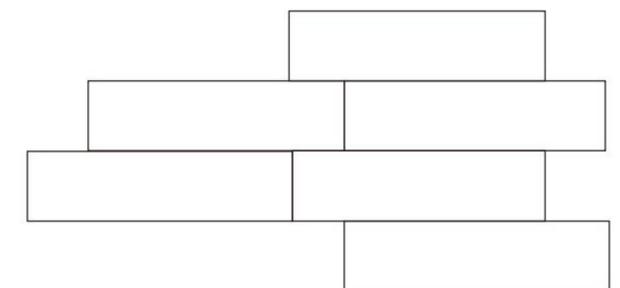





Garden Cafe



COLORKEY ABC01

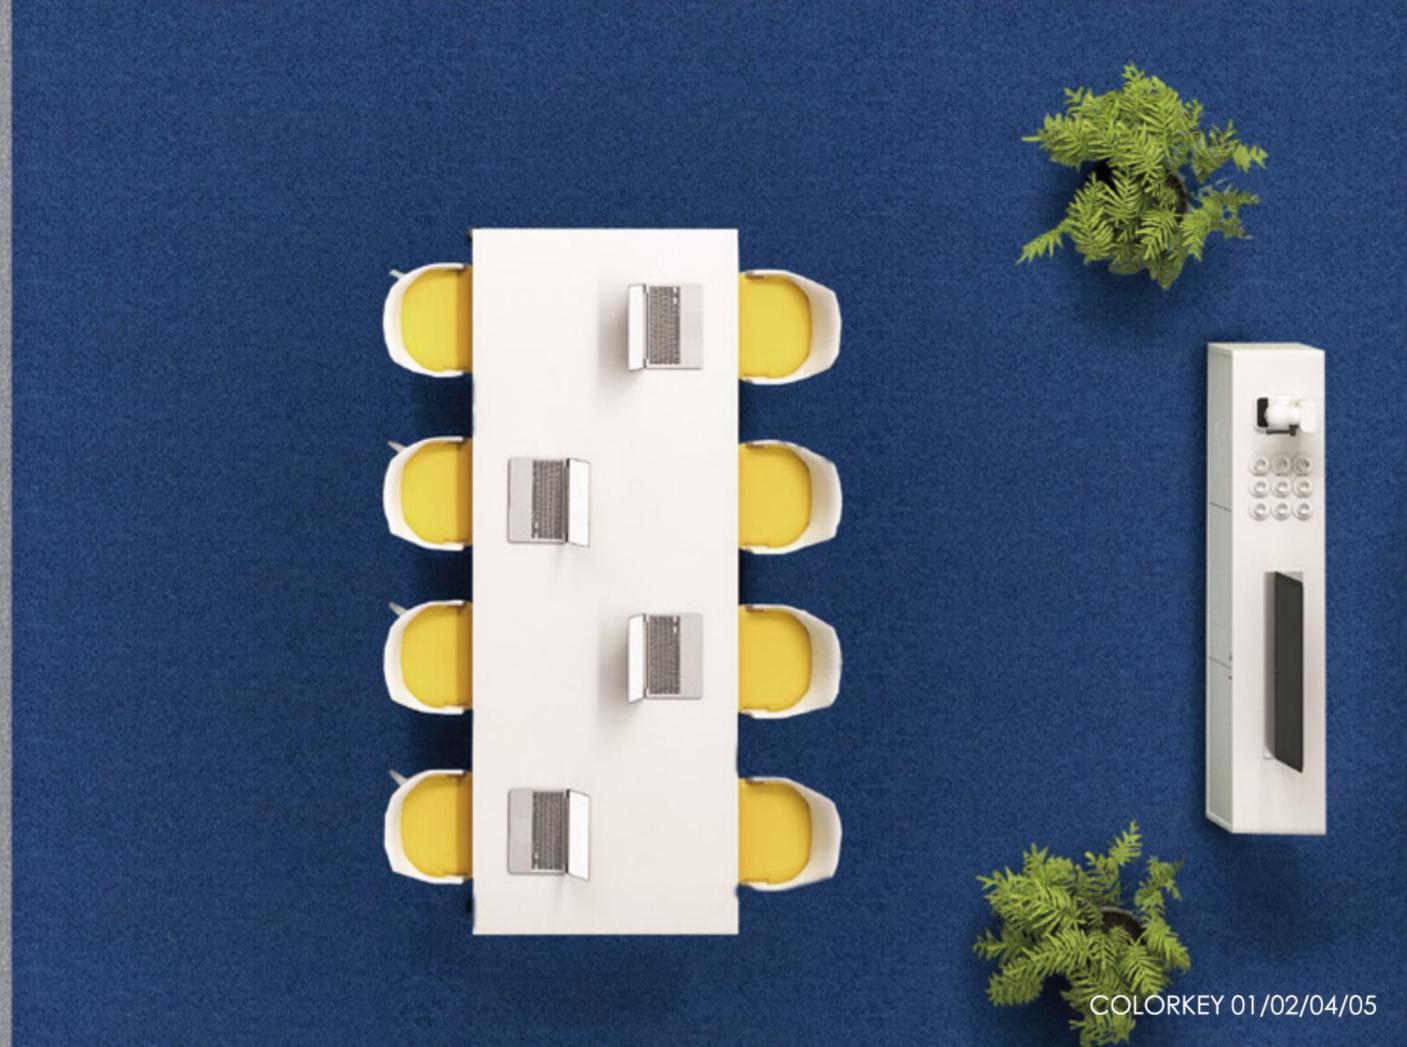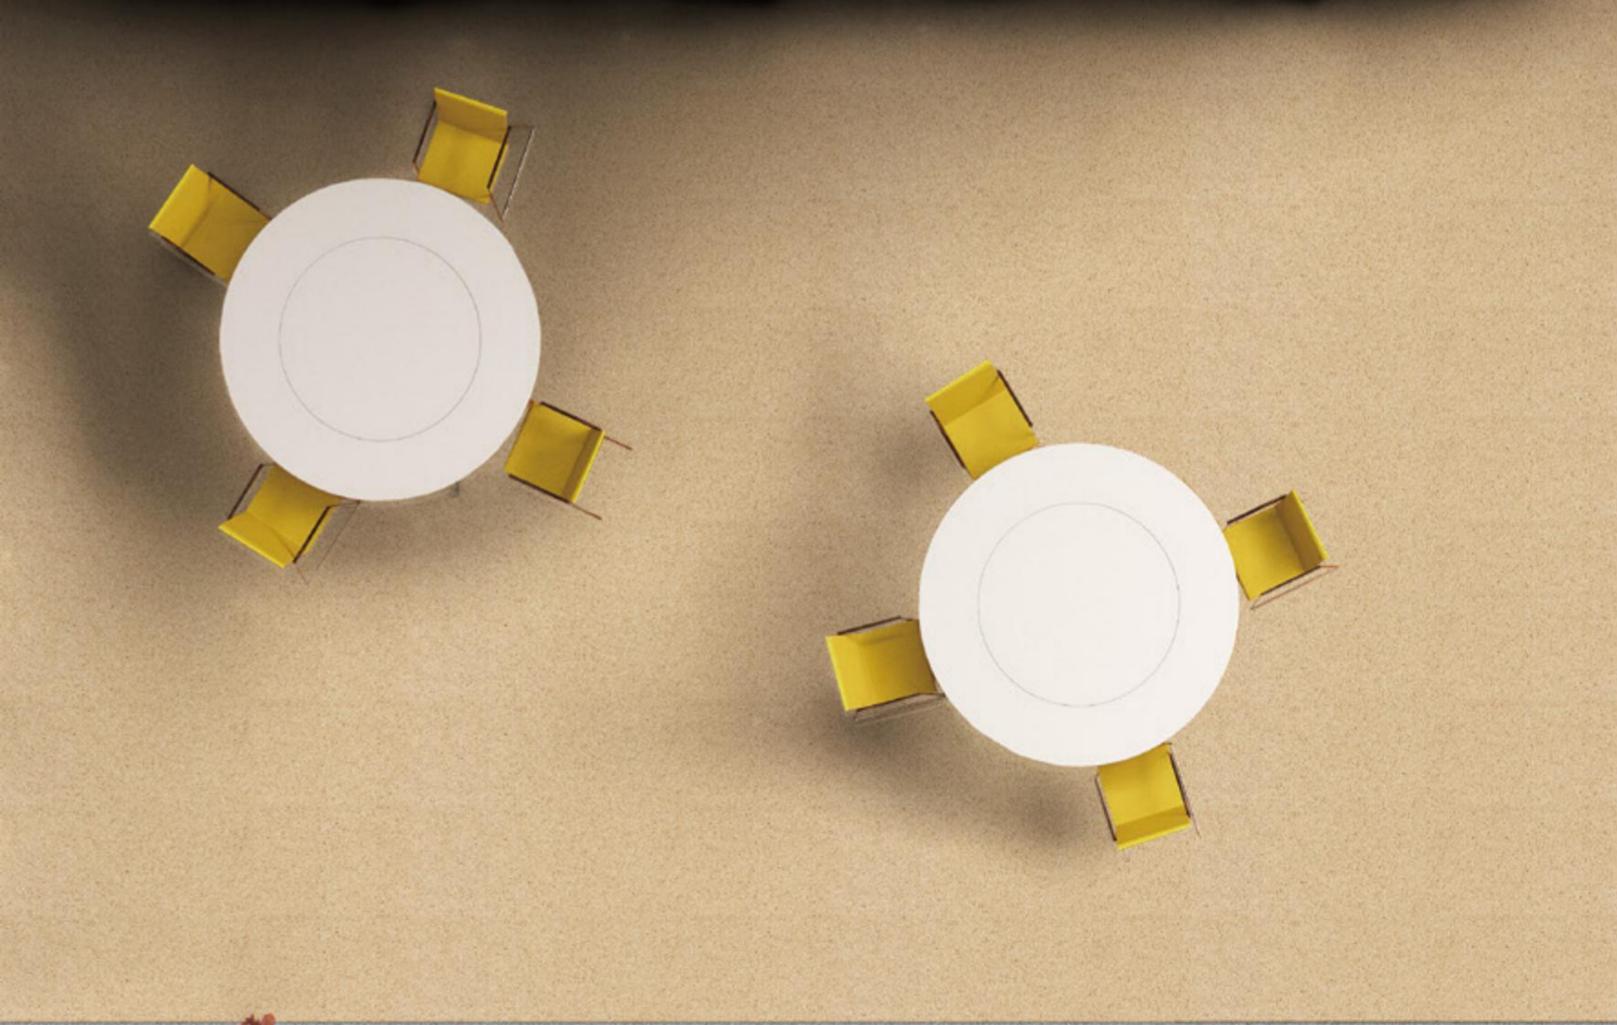

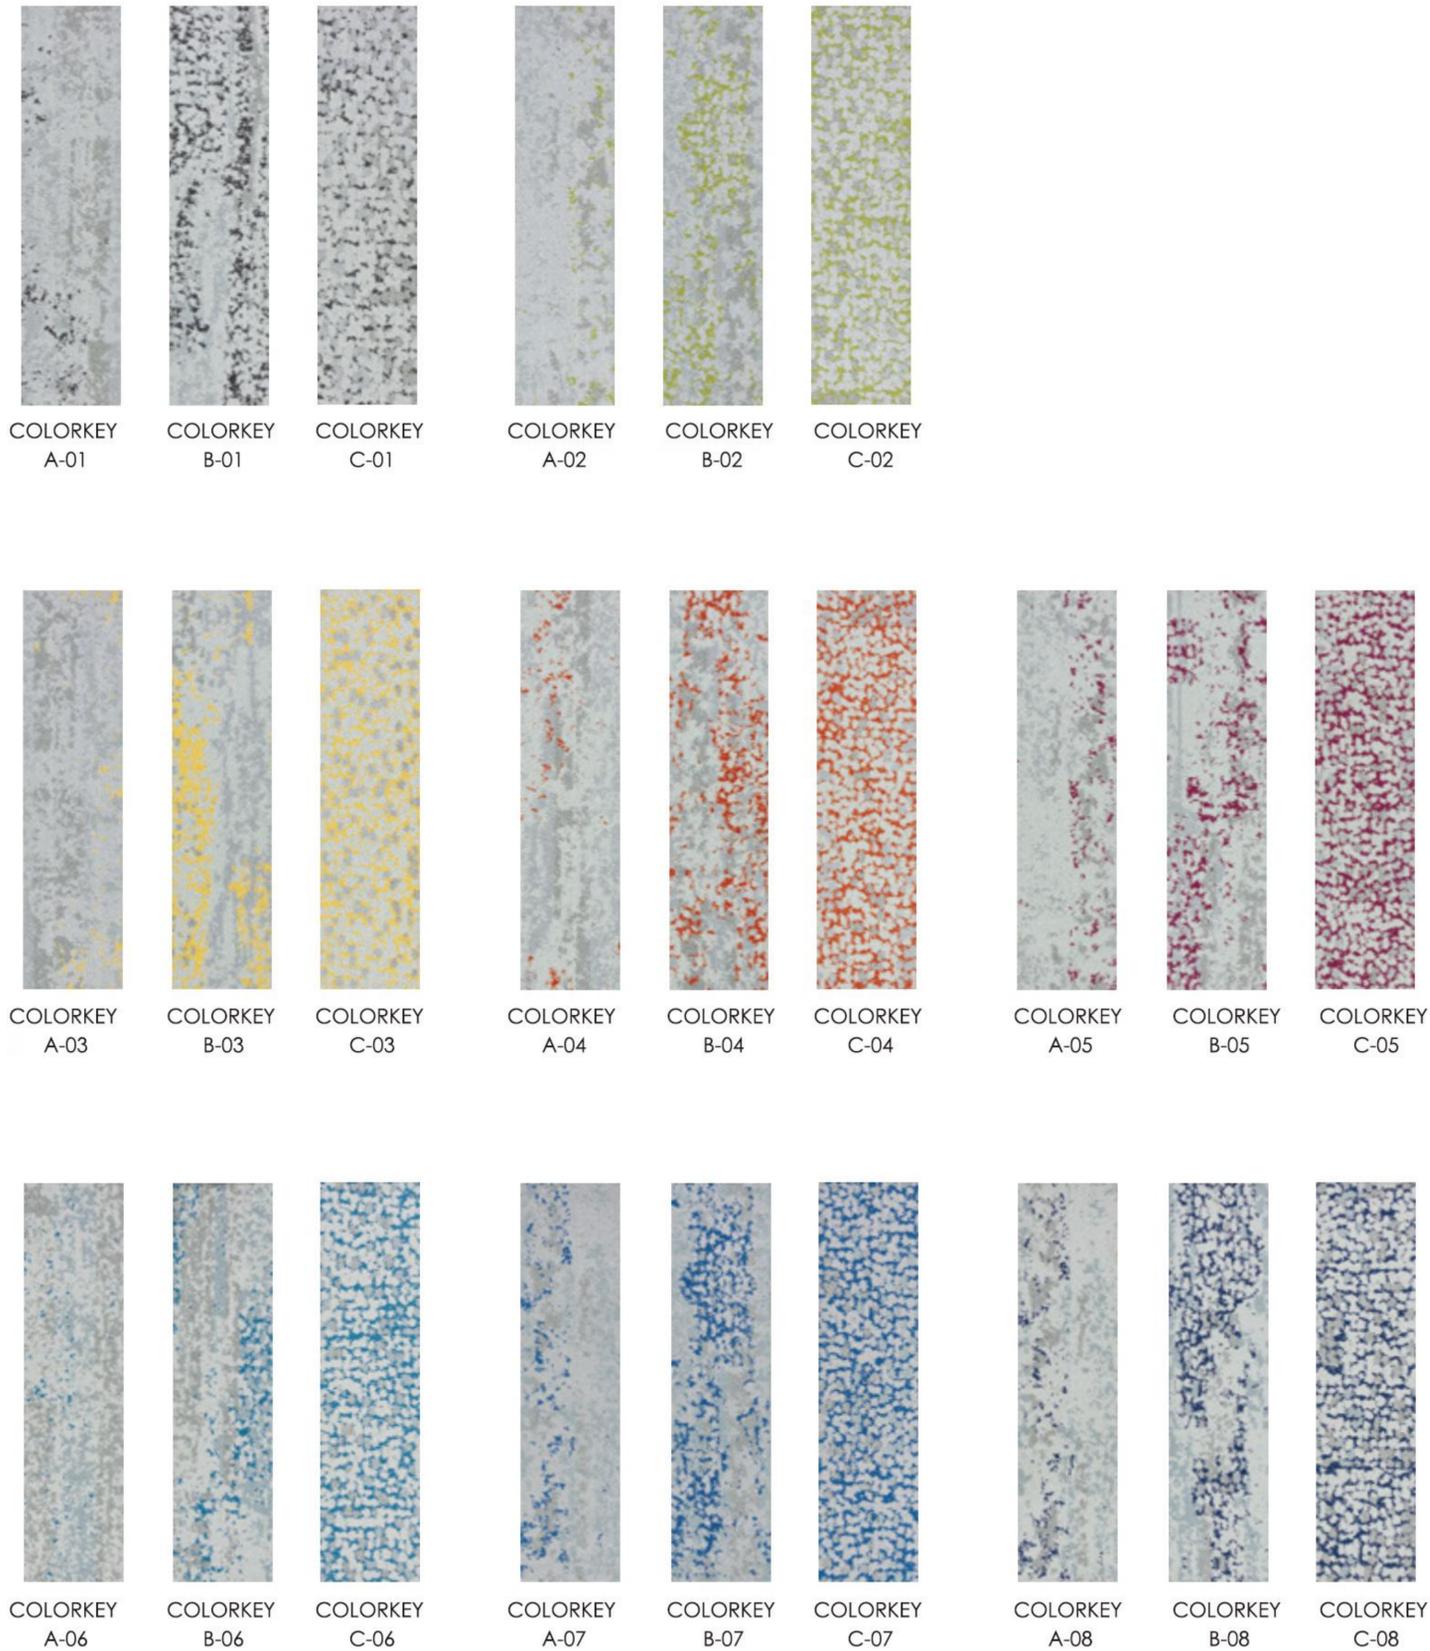

COLORKEY


SPECIFICATION:

Face yarn:	100% Nylon Beaulieu
Dye method:	100% Solution Dyed
Gauge:	1/10
Structure:	Multi-level loop pile
Pile weight:	760g-910g/sqm (+/-5%)
Total weight:	6000g/sqm(+/-5%)
Pile height:	6.5mm(+/-0.5mm)
Total height:	8.5mm(+/-0.5mm)
Backing:	PVC
Size:	25cm*100cm

PERFORMANCE

Classification:	33
Castor chair rating:	A: intensive use
Fire classification:	Bf1-S1
Colour fastness to light:	6 grade QB/T 2755-2005
Soil resistance:	2-3 grade ISO11378-2: 2001
Permanent antistatic:	≤2kv AATCC134-2016
Impact sound insulation:	ΔL _w :26 dB
Sound absorption:	Frequency Hz:125 250 500 1000 2000 4000 α _s 0.01 0.05 0.08 0.22 0.34 0.44 α _w : 0.20
Noise reduction:	α _w : 0.20
Rubbing fastness:	4-5 grade QB/T 2755-2005
Indoor air quality:	(GB18587-2001 A grade) TVOC ≤0.500mg/m ³ h Formaldehyde≤ 0.050mg/m ³ h Styrene≤ 0.400mg/m ³ h 4-phenylcyclohexene≤ 0.050mg/m ³ h

Installation method

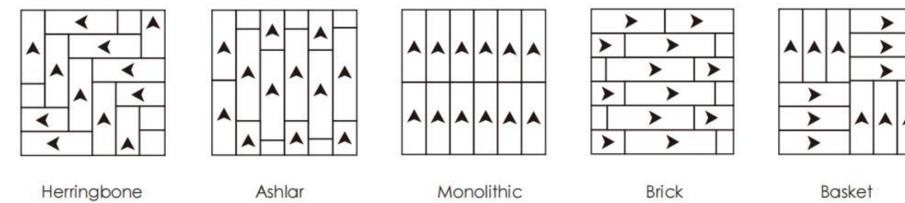



COLORKEY-01



COLORKEY-02



COLORKEY-03



COLORKEY-04



COLORKEY-05



COLORKEY-06



COLORKEY-07



COLORKEY-08

COLORKEY


SPECIFICATION:

Face yarn:	100% Nylon Aquafil
Dye method:	100% Solution Dyed
Gauge:	1/8
Structure:	Cut pile
Pile weight:	1100g/sqm (+/-5%)
Total weight:	5600g/sqm(+/-5%)
Pile height:	8.5mm(+/-0.5mm)
Total height:	11.5mm(+/-0.5mm)
Backing:	PVC
Size:	50cm*100cm/25cm*100cm


PERFORMANCE

Classification:	33
Castor chair rating:	A: intensive use
Fire classification:	Bf1-S1
Colour fastness to light:	6 grade QB/T 2755-2005
Soil resistance:	2-3 grade ISO11378-2:2001
Permanent antistatic:	≤2kv AATCC134-2016
Impact sound insulation:	ΔL _w :26 dB
Sound absorption:	Frequency Hz:125 250 500 1000 2000 4000 α _s 0.01 0.05 0.08 0.22 0.34 0.44
Noise reduction:	α _w :0.20
Rubbing fastness:	4-5 grade QB/T 2755-2005
Indoor air quality:	(GB18587-2001 A grade) TVOC ≤0.500mg/m ³ h Formaldehyde≤ 0.050mg/m ³ h Styrene≤ 0.400mg/m ³ h 4-phenylcyclohexene≤ 0.050mg/m ³ h


Installation method




Herringbone




Ashlar



Monolithic



Brick



Basket

